

HSF

NOTES:


Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze/Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

Ordering Information

5310-XX B XX B 01

- | | | | |
|-------------|------------------|------------------|-----------------|
| No. of Pins | Contact Material | Contact Plating | Color Insulator |
| 06 30 | S0=Gold Flash/Ni | S0=Gold Flash/Ni | B=Black |
| 08 34 | B=Brass | S3=10u"Gold/Ni | G=Grey(427C) |
| 10 36 | P=Phosphor | S4=15u"Gold/Ni | B=Grey(413C) |
| 14 40 | Bronze | S5=30u"Gold/Ni | |
| 16 50 | | SN=Sn | |
| 20 60 | | SM=Matte Tin | |
| 24 64 | | | |
| 26 | | | |

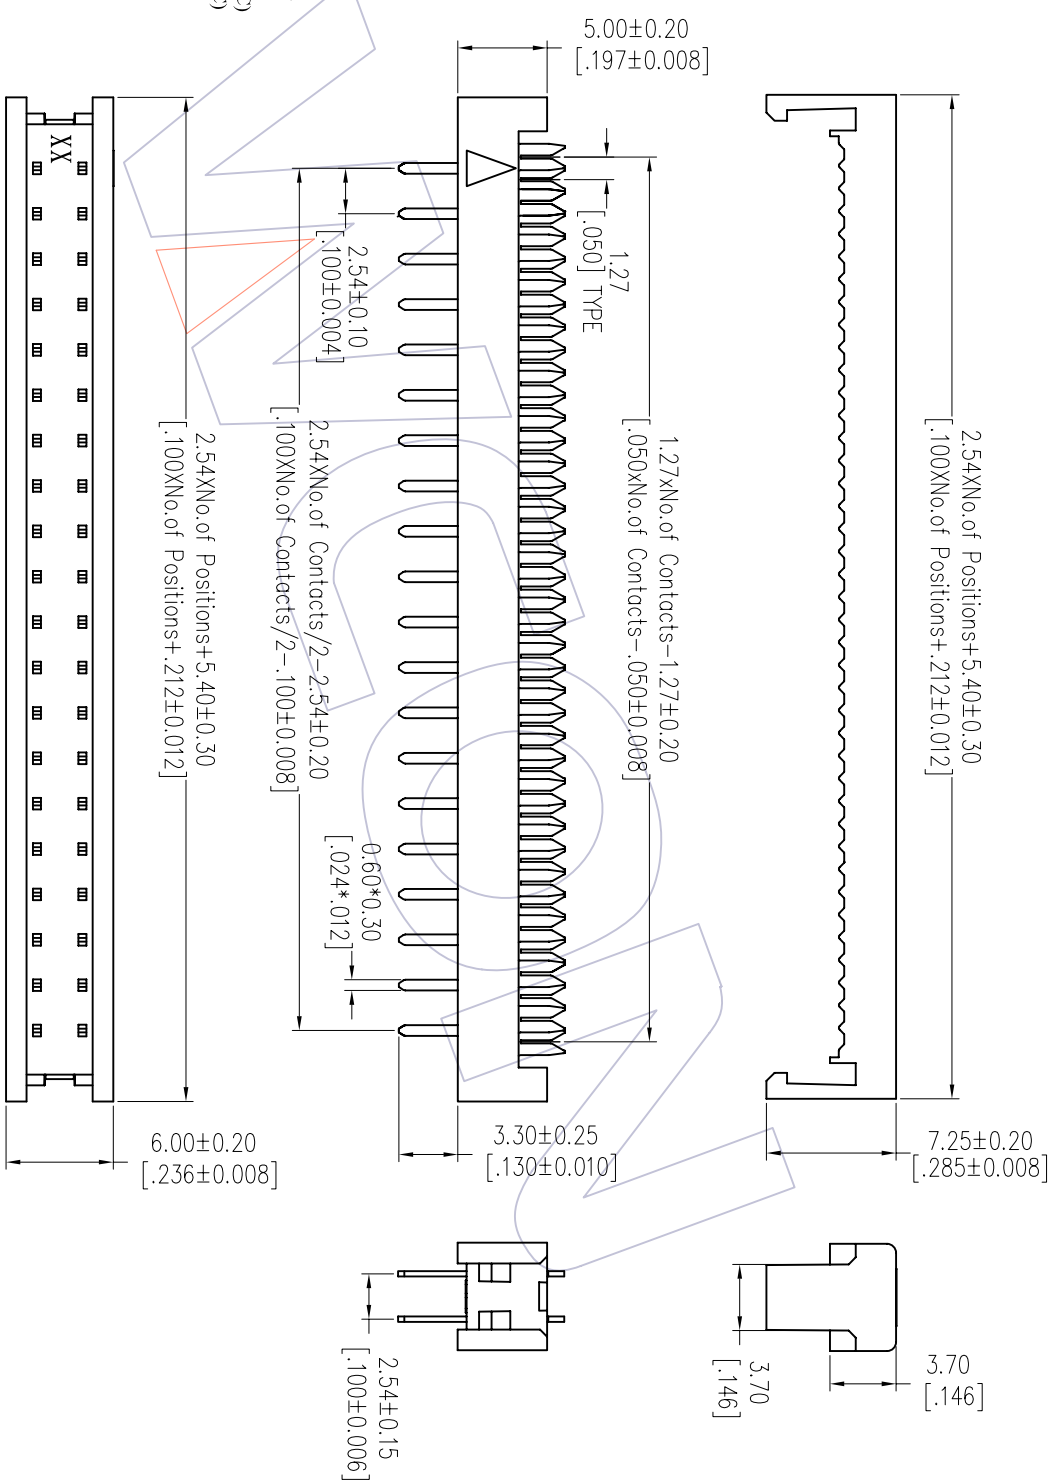

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE: 2.54 DIP PLUG CONNECTOR (TERMINATED HEIGHT 7.2)	Customer NO.
A0	2012/10/09	NEW	---	XX	JYHuang	2012/10/09	mm	A4	5310-XXXXXB01		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	CHECK	DATE	SIZE	SHEET	PROJ.	WCON-Dongguan Http: www.wcon.com Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com	

WCON